



COMMONWEALTH ELECTRONICS PTY. LTD.

present a Professional


Miniature BATTERY TAPE RECORDER

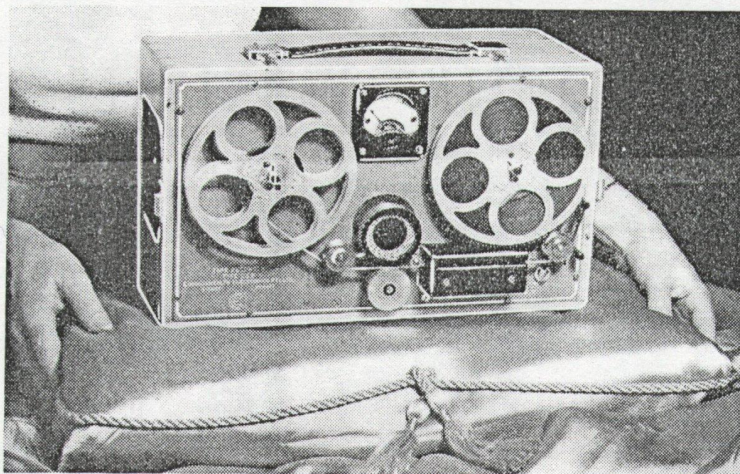

THE TYPE CEB.

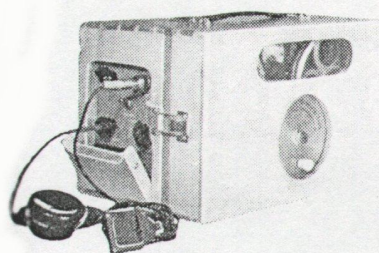

COMPLETE FOR INSTANT OPERATION

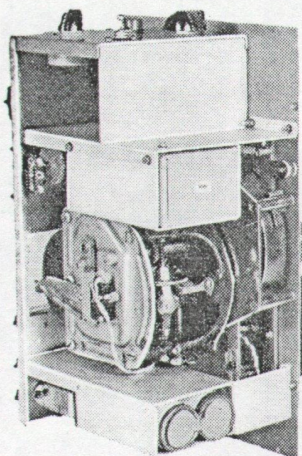

EQUIPPED WITH STURDY SPRING MOTOR.

CHECK THESE FEATURES . . .

- ★ Size $13\frac{1}{2}'' \times 8\frac{1}{2}'' \times 8\frac{1}{4}''$ H (inc. all accessories)
- ★ Weight 25 lbs. (inc. all accessories.)
- ★ Exclusive Ferroxcube heads with Azimuth Adjustments.
- ★ Separate Recording & Monitoring/Playback Channels.
- ★ Spring Motor Drive with 6 min. Running Time.
- ★ Motor Rewind Alarm.
- ★ Combined Recording Level Meter & Multimeter.
- ★ Stroboscopic Speed Check.
- ★ High-Speed Tape Rewind.
- ★ Operates in any Position.
- ★ Battery Complement, one type 490P, two type 701.

CHECK THIS PERFORMANCE . . .

- ★ Battery Life 50 hours, Intermittent Operation.
- ★ Frequency Response— ± 2 db, 50 to 7000 c.p.s.
- ★ Distortion 1000 c.p.s.— Better than 3%
- ★ Signal to Noise Ratio— Better than — 40 db.


FOR FURTHER DETAILS WRITE TO—
BOX 1647 G.P.O. SYDNEY, N.S.W.

COMMONWEALTH ELECTRONICS PTY. LTD.

N.S.W.: JAMES ST., BAULKHAM HILLS.


TAS.: DERWENT PARK ANNEXE, HOBART.



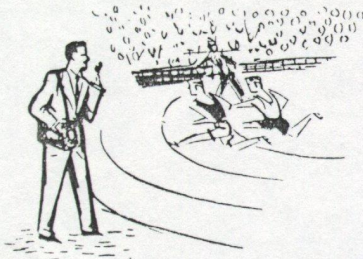


SELECTED FOR USE AT THE OLYMPIC GAMES, MELBOURNE, 1956

Another outstanding




TAPE RECORDER

BY COMMONWEALTH
ELECTRONICS PTY. LTD.

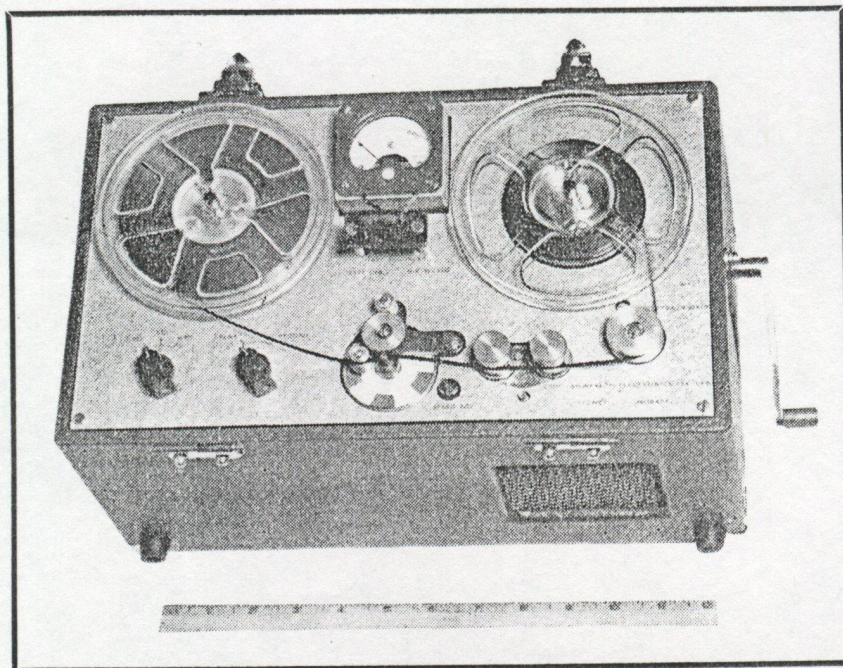

- MINIATURE PORTABLE
- BATTERY OPERATED
- TYPE C.E.B.

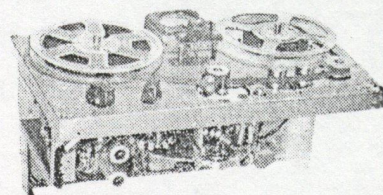

SHOCK MOUNTED VALVE CHASSIS

THE CHOICE OF THE NATIONAL BROADCASTING SERVICES, COMMERCIAL BROADCASTING STATIONS, AND OVERSEAS ADMINISTRATIONS.

FEATURES:

- Size, 14" x 8½" x 8½" H. • Weight, 25 lbs. (including Batteries) • Exclusive Ferroxcube Recording Head with Azimuth adjustment. • Separate recording and monitoring channels. • Loudspeaker playback channel. • Spring motor drive. • Operates from Studio type moving coil microphone. • Records while rewinding • Combined recording level meter and multi-meter. • Stroboscopic speed check. • High speed tape rewind. • Battery complement, one type 742 L.T. Two type 467 H.T.



PERFORMANCE:

- Battery life, 50 hours (app.). (Intermittent operation). • Tape speed, 7½" per second. • Frequency response, ± 2 db 100 to 7000 c.p.s. • Signal to noise ratio, better than 40 db. • Total WOW & flutter, less than 0.35%.

FOR FURTHER DETAILS, WRITE TO:
BOX 1647, G.P.O., SYDNEY, N.S.W.

Commonwealth Electronics Pty. Ltd.

N.S.W. - - - JAMES STREET, BAULKHAM HILLS
TASMANIA - - - DERWENT PARK ANNEXE, HOBART

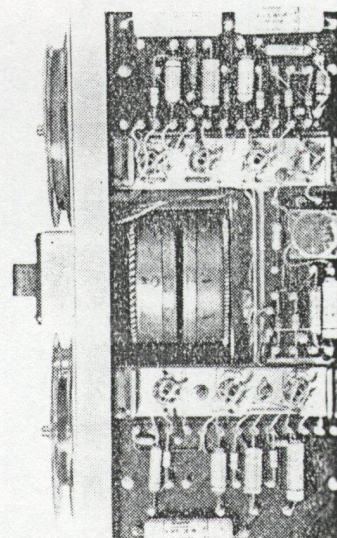

EQUIPPED WITH STURDY 2 SPRING
DRIVE MOTOR